

KL

Clamp Type Single Filter Bag Housing

Design P.	150psi
Design T.	100°C
Max Operating P.	150psi
Operating T.	75°C

Features

1. Single bag filter with adjustable support leg for simplified installation.
2. SUS304 clamp improves sealing and reduces product loss.
3. Well O-ring groove design improves sealing and prevents loosening.





Applications

Chemicals	RO Pre-filtration process
Petrochemical	Water filtration
Beverage Industry	Pharmaceutical
Liquor manufacture	Experiment Process
Food industry	Gas Filter
Electroplating Industry	Sewage treatment
High temperature manufacturing processes	Electronic Industry



KL Ordering Guide

KL	2	4	SB	2	10K	E	EA
Model	Bag Size	Material	Connction	Connection Size	Connection Type	O-ring	Outside / Inside Finishes
KL	1-Bag No.1 2-Bag No.2 3-Bag No.3 4-Bag No.4	4-304 6-316 6L-316L	Side In & Side Out Side In & Bottom Out	21-1/2" 43-3/4" 1-1" 121-1-1/2" 2-2" 221-2-1/2" 3-3"	150P-ANSI 10K-JIS PN10-DIN C-CLAMP PF-PTF NF-NPTF PM-PTM NM-NPTM	E-EPDM N-NBR V-VITON S-Silicon T-Teflon +Silicon	A-Acid-pickling E-Electropolishing P-Polishing

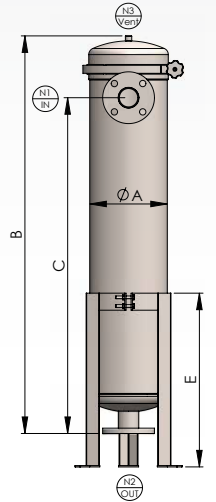

KL Specifications

Model	A m/m	B m/m	C m/m	D m/m	E m/m	F (PCD) m/m	G m/m	M3/Hr	GPM	Weight	Volume
KL1	Ø232	735	550	176	515	Ø323	Ø12	20	90	21kg	27L
KL2	Ø232	1190	1005	176	515	Ø323	Ø12	45	200	26kg	46L
KL3	Ø180	535	360	150	350	Ø252	Ø12	4.5	20	14kg	11L
KL4	Ø180	670	495	150	350	Ø252	Ø12	9	45	15kg	14L