

SA

Sanitary Single Filter Cartridge Housing (Clamp Type)

Design P.	150psi
Design T.	100°C
Max Operating P.	150psi
Operating T.	75°C

Features

1. Sanitary type single filter cartridge housing is the best choice for food industry, Pharmaceutical and other applications
2. 0.2RA surface roughness
3. Complete inside and outside finishing with no blind spot prevents residual dirt.
4. Tightly seal of base and shell with clamp type closure prevents spillage.




Applications

Chemicals	RO Pre-filtration process
Petrochemical	Water filtration
Beverage Industry	Pharmaceutical
Liquor manufacture	Experiment Process
Food industry	Gas Filter
Electroplating Industry	Sewage treatment
High temperature manufacturing processes	Electronic Industry



SA Ordering Guide

SA	1	4	F	1	C	E	PP
Model	Length	Material	Adapter	Connection Size	Connection Type	O-ring	Outside / Inside Finishes
SA	1-10" 2-20" 3-30"	4-304 6-316 6L-316L	F-DOE 5-222 7-226	43-3/4" 1-1"	150P-ANSI 10K-JIS PN10-DIN C-CLAMP PF-PTF NF-NPTF PM-PTM NM-NPTM	E-EPDM N-NBR V-VITON S-Silicon T-Teflon	E-Electropolishing P-Polishing

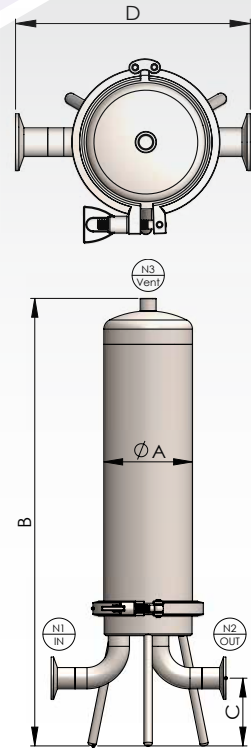

SA Specifications

Model	Length of Cartridge	A m/m	B m/m	C m/m	D m/m	M3/Hr	GPM	Weight
SA1	10"	Ø106	500	77	207	1	5	4.5kg
SA2	20"	Ø106	750	77	207	2	10	6.0kg
SA3	30"	Ø106	1000	77	207	3	15	7.5kg