

SL

Sanitary Multi Filter Cartridge Housing (Clamp Type)

Design P.	150psi
Design T.	100°C
Max Operating P.	150psi
Operating T.	75°C

Features

1. Sanitary type single filter cartridge housing is the best choice for food industry, Pharmaceutical and other applications.
2. 0.2RA surface roughness.
3. Complete inside and outside finishing with no blind spot to prevent residual dirt.
4. Tightly seal of base and shell with clamp closure prevents spillage.
5. Up to 20" tall shell with two clamp closures allows for easy clean and filter bag change-outs without tool.





Applications

Chemicals	RO Pre-filtration process
Petrochemical	Water filtration
Beverage Industry	Pharmaceutical
Liquor manufacture	Experiment Process
Food industry	Gas Filter
Electroplating Industry	Sewage treatment
High temperature manufacturing processes	Electronic Industry



SL Ordering Guide

SL	6	2	4	5	2	C	E	PP
Model	No. of Filter Cartridge	Length	Material	Adapter	Connection Size	Connection Type	O-ring	Outside / Inside Finishes
SL	3	1-10"	4-304	F-DOE	21-1/2"	150P-ANSI	E-EPDM	E-Electropolishing
	4	2-20"	6-316	5-222	43-3/4"	10K-JIS	N-NBR	P-Polishing
	5	3-30"	6L-316L	7-226	1-1"	PN10-DIN	V-VITON	
	6	4-40"			121-1-1/2"	C-CLAMP	S-SILICON	
					2-2"	PF-PTF	TS-TEFLON + SILICON	
					221-2-1/2"	NF-NPTF		
						PM-PTM		
						NM-NPTM		

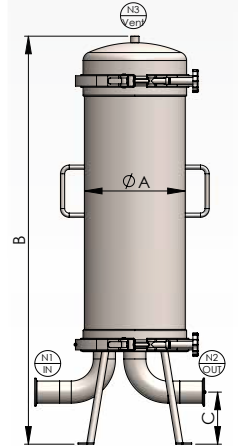

SL Specifications

Model	Length of Cartridge	A m/m	B m/m	C m/m	D m/m	E(PCD) m/m	F m/m	M3/Hr	GPM	Weight	Volume
SL2~6	10"	Ø232	675	120	332	Ø368	Ø12	3~6	15~30	21kg	14L
SL2~6	20"	Ø232	930	120	332	Ø368	Ø12	6~12	30~60	26kg	24L
SL2~6	30"	Ø232	1175	120	332	Ø368	Ø12	9~18	45~90	29.5kg	35L
SL2~6	40"	Ø232	1425	120	332	Ø368	Ø12	12~24	60~120	33kg	45L