


# RL8

RO Membrane Housing  
(Low Pressure Type)

Design P.	300psi
Design T.	100°C
Max Operating P.	300psi
Operating T.	75°C

## Features

1. RL8" Membrane Shell.
2. Efficient filtering with High flow velocity.
3. Tightly seal of top&bottom cover and shell.
4. Strong consistency of RL8 membranecand allows for excellent duralibiltye.

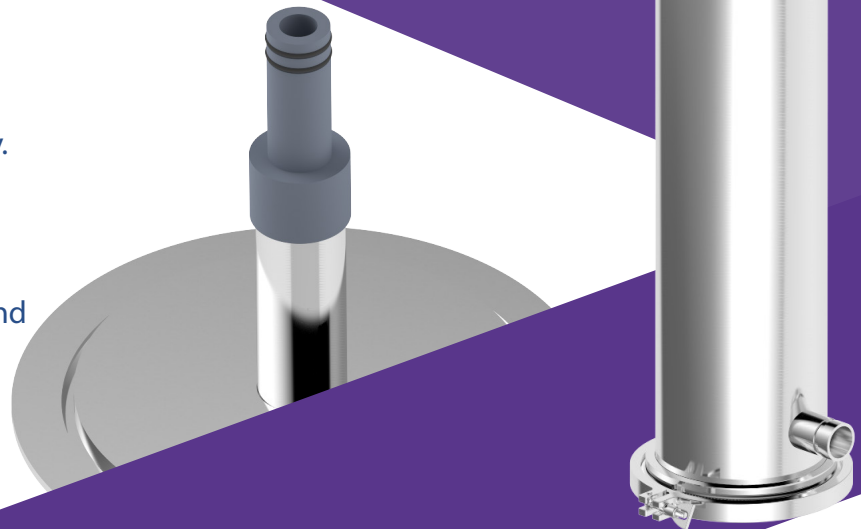


## Applications

Chemicals	RO Pre-filtration process
Petrochemical	Water filtration
Beverage Industry	Pharmaceutical
Liquor manufacture	Experiment Process
Food industry	Gas Filter
Electroplating Industry	Sewage treatment
High temperature manufacturing processes	Electronic Industry



# RL8 Ordering Guide

RL8	4	4	1	PF	1	V	E	BA
Model	Length	Shell Material	N1 Size	N1 Type	N2 Size	N2 Type	O-ring	Outside / Inside Finishes
RL8	4-40" 8-80" 12-120" 16-160" 20-200"	4-304 6-316	1-1" 121-1-1/2" 2-2"	PF-PTF NF-NPTF V-Adapter C-CLAMP	1-1" 121-1-1/2" 2-2"	PF-PTF NF-NPTF V-Adapter C-CLAMP	E-EPDM N-NBR V-VITON	B-Burnishing A-Acid pickling P-Polishing

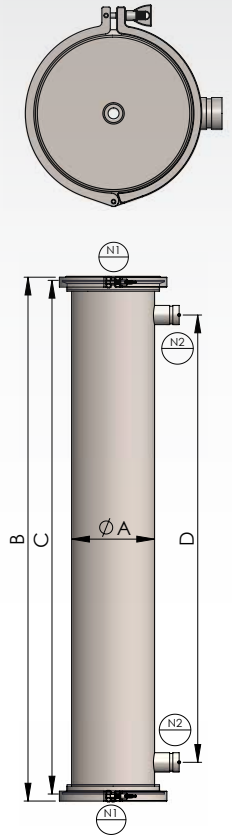

## RL8 Specifications

Model	A m/m	B m/m	C m/m	N1	N2	Weight
RL8-4	Ø210	1328	1300	1"	1-1/2"	31kg
RL8-8	Ø210	2344	2316	1"	1-1/2"	47kg
RL8-12	Ø210	3360	3332	1"	1-1/2"	63kg
RL8-16	Ø210	4376	4348	1"	1-1/2"	78kg
RL8-20	Ø210	5392	5364	1"	1-1/2"	94kg