


RH8

RO Membrane Housing
(High Pressure Type)

| | |
|------------------|--------|
| Design P. | 300psi |
| Design T. | 100°C |
| Max Operating P. | 300psi |
| Operating T. | 75°C |

Features

1. Efficient filtering with High flow velocity
2. Tightly seal of top&bottom cover and shell.
3. Strong consistency of RH8 menbracand allows for excellent duralibiltye.

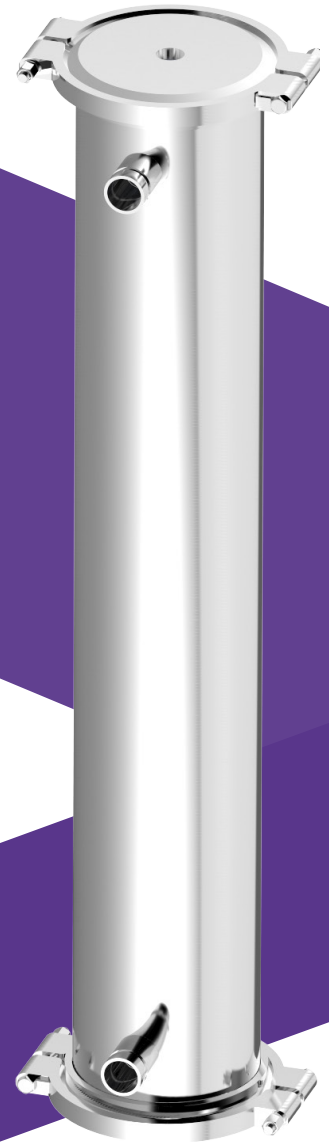


Applications

| | |
|------------------------------------------|---------------------------|
| Chemicals | RO Pre-filtration process |
| Petrochemical | Water filtration |
| Beverage Industry | Pharmaceutical |
| Liquor manufacture | Experiment Process |
| Food industry | Gas Filter |
| Electroplating Industry | Sewage treatment |
| High temperature manufacturing processes | Electronic Industry |



RH8 Ordering Guide

| RL8 | 4 | 4 | 1 | PF | 1 | V | E | BA |
|-------|-------------------------------------------------|----------------|----------------------------|-------------------------------------------|----------------------------|-------------------------------------------|----------------------------|------------------------------------------------|
| Model | Length | Shell Material | N1 Size | N1 Type | N2 Size | N2 Type | O-ring | Outside / Inside Finishes |
| RH8 | 4-40" 8-80" 12-120" 16-160" 20-200" | 4-304 6-316 | 1-1" 121-1-1/2" 2-2" | PF-PTF NF-NPTF V-Adapter C-CLAMP | 1-1" 121-1-1/2" 2-2" | PF-PTF NF-NPTF V-Adapter C-CLAMP | E-EPDM N-NBR V-VITON | B-Burnishing A-Acid pickling P-Polishing |

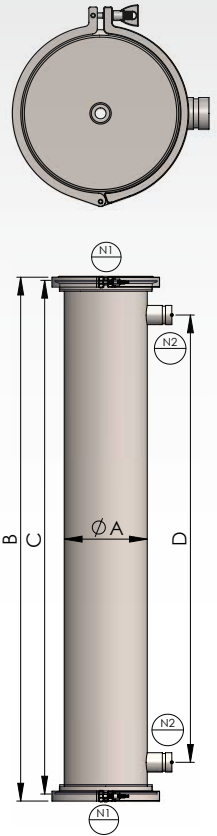

RH8 Specifications

| Model | A m/m | B m/m | C m/m | N1 | N2 | Weight |
|--------|-------|-------|-------|----|--------|--------|
| RH8-4 | Ø216 | 1197 | 1300 | 1" | 1-1/2" | 64kg |
| RH8-8 | Ø216 | 2353 | 2316 | 1" | 1-1/2" | 100kg |
| RH8-12 | Ø216 | 3369 | 3332 | 1" | 1-1/2" | 136kg |
| RH8-16 | Ø216 | 4385 | 4348 | 1" | 1-1/2" | 172kg |
| RH8-20 | Ø216 | 5401 | 5364 | 1" | 1-1/2" | 208kg |