

HA

Household Filter Cartridge Housing (Standard Type)

Design P.	150psi
Design T.	75°C
Max Operating P.	50psi
Operating T.	40°C




Features

1. Easy maintainance for family use
2. SUS304 clamp closure and heavy-duty gasket improves sealing and reduces product loss.
3. High-thickness rubber Oring allows for easy installation and resistance of spillage.
4. Thick and solid top cover provides excellent durability.




Applications

Chemicals	RO Pre-filtration process
Petrochemical	Water filtration
Beverage Industry	Pharmaceutical
Liquor manufacture	Experiment Process
Food industry	Gas Filter
Electroplating Industry	Sewage treatment
High temperature manufacturing processes	Electronic Industry

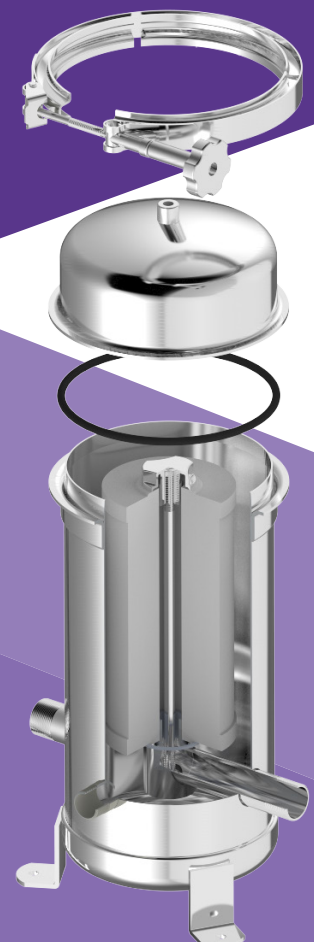

HA Ordering Guide

HA	1	4	F	1	PF	E	EA
Model	Length	Material	Adapters	Connection Size	Connection Type	O-ring	Outside / Inside Finishing
HA	1-10" 2-20"	4-304	F-DOE 5-222	1-1"	PF-PTF NF-NPTF PM-PTM NM-NPTM	E-EPDM N-NBR V-VITON S-Silicon TS-TEFLON +SILICON	A-Acid-pickling E-Electropolishing P-Polishing

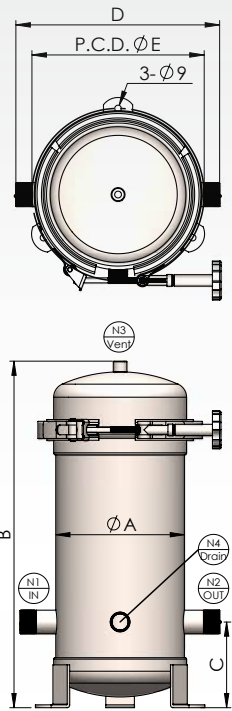

HA Specifications

Model	Length	A m/m	B m/m	C m/m	D m/m	E(PCD) m/m	Weight
HA1	10"	Ø180	445	120	280	Ø236	8kg
HA2	20"	Ø180	695	120	280	Ø236	9.7kg