

# RH8


## 8"RO 管件 ( 高壓型 ) RO Membrane Housing (High Pressure Type)





|                             |                                                                  |                            |                                   |
|-----------------------------|------------------------------------------------------------------|----------------------------|-----------------------------------|
| 設計壓力<br>Design P.           | 40 kgf/cm <sup>2</sup><br>600 psi                                | 最大操作壓力<br>Max Operating P. | 40 kgf/cm <sup>2</sup><br>600 psi |
| 設計溫度<br>Design T.           | 100℃                                                             | 操作溫度<br>Operating T.       | 75℃                               |
| 標準口徑<br>Standards<br>Nozzle | N1-1 內牙、N2-1 1/2" 機械接頭<br>N1-1PT-F. N2-1 1/2"V. Mechanical Joint |                            |                                   |



| RH8           | 4                                               | 4                      | 1                          | PF                                                 | 1                          | V                                                  | E                          | BA                                                                 |
|---------------|-------------------------------------------------|------------------------|----------------------------|----------------------------------------------------|----------------------------|----------------------------------------------------|----------------------------|--------------------------------------------------------------------|
| 產品型號<br>Model | 管身尺寸<br>Length                                  | 管身材質<br>Shell Material | N1 尺寸<br>N1 Size           | N1 規格<br>N1 Type                                   | N2 尺寸<br>N2 Size           | N2 規格<br>N2 Type                                   | O 環材質<br>O-ring            | 外 / 內表面處理<br>Exterior / Interior<br>Surface Finishing              |
|               | 4-40"<br>8-80"<br>12-120"<br>16-160"<br>20-200" | 4-304<br>6-316         | 1-1"<br>121-1-1/2"<br>2-2" | PF-PTF<br>NF-NPTF<br>V-Mechanical Joint<br>C-CLAMP | 1-1"<br>121-1-1/2"<br>2-2" | PF-PTF<br>NF-NPTF<br>V-Mechanical Joint<br>C-CLAMP | E-EPDM<br>N-NBR<br>V-VITON | A- 酸洗<br>ACID-Washing<br>B- 研磨<br>Burnishing<br>P- 拋光<br>Polishing |

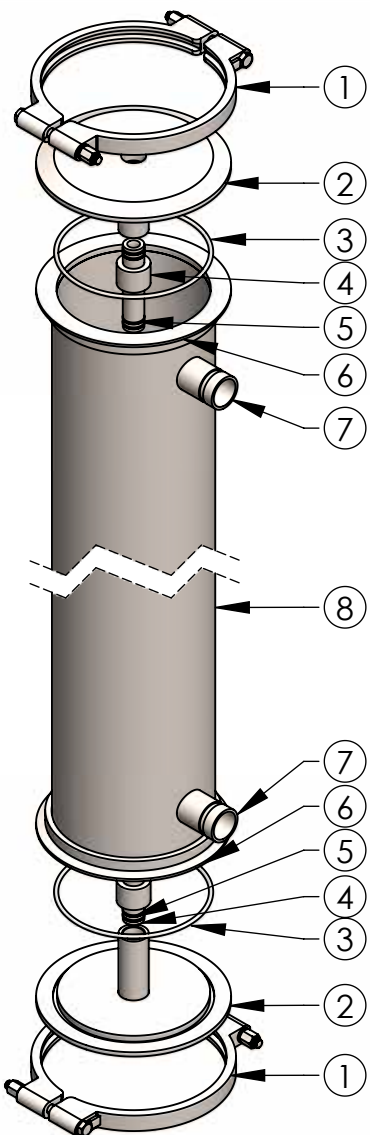

| No. | 名稱     | Description      |
|-----|--------|------------------|
| 1   | 束環     | Clamp            |
| 2   | RO 端板  | RO Head          |
| 3   | O 型環   | O-ring           |
| 4   | PVC 接管 | PVC Coupling     |
| 5   | O 型環   | O-ring           |
| 6   | 桶唇     | Shell flange     |
| 7   | 機械接頭   | Mechanical Joint |
| 8   | 管殼     | Shell            |

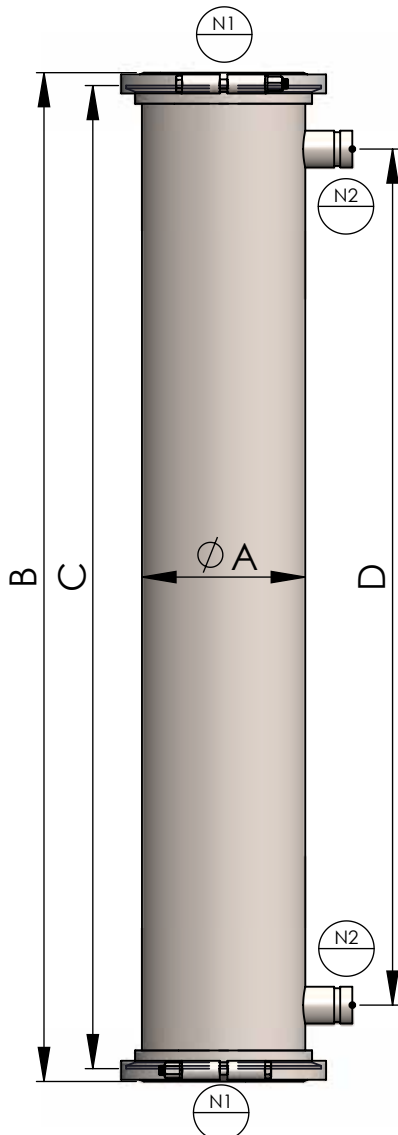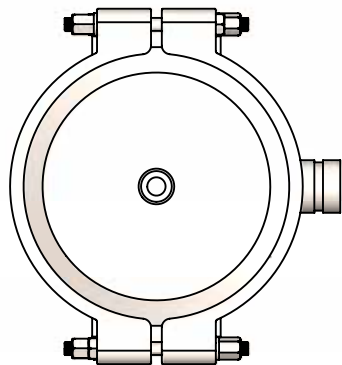

| 型式<br>Model | A m/m | B m/m | C m/m | D m/m | N1 | N2     | 重量<br>Weight |
|-------------|-------|-------|-------|-------|----|--------|--------------|
| RH8-4       | Ø216  | 1137  | 1300  | 1132  | 1" | 1-1/2" | 64kg         |
| RH8-8       | Ø216  | 2353  | 2316  | 2148  | 1" | 1-1/2" | 100kg        |
| RH8-12      | Ø216  | 3369  | 3332  | 3164  | 1" | 1-1/2" | 136kg        |
| RH8-16      | Ø216  | 4385  | 4348  | 4180  | 1" | 1-1/2" | 172kg        |
| RH8-20      | Ø216  | 5401  | 5364  | 5196  | 1" | 1-1/2" | 208kg        |