

KH

Swing Bolt Type Single Filter Bag Housing (Bag No.1 ~ No.2)

| | |
|------------------|--------|
| Design P. | 225psi |
| Design T. | 100°C |
| Max Operating P. | 225psi |
| Operating T. | 75°C |

Features

1. Single bag filter with adjustable support leg for simplified installation.
2. Swing-bolt type allows for tightly closure and easy installation without tool.
3. Well O-ring groove design improves sealing and prevents loosening.
4. Opening angle of 105 degree for easy and space-saving bag filter change-outs.





Applications

| | |
|--|---------------------------|
| Chemicals | RO Pre-filtration process |
| Petrochemical | Water filtration |
| Beverage Industry | Pharmaceutical |
| Liquor manufacture | Experiment Process |
| Food industry | Gas Filter |
| Electroplating Industry | Sewage treatment |
| High temperature manufacturing processes | Electronic Industry |



KH Ordering Guide

| KH | 2 | 4 | SB | 2 | 10K | E | EA |
|------------|------------|----------|----------------------|-----------------|-----------------|-------------------|---|
| Model | Bag Size | Material | Connction | Connection Size | Connection Type | O-ring | Outside / Inside Finishes |
| KH | 1-Bag No.1 | 4-304 | Side In & Side Out | 21-1/2" | 150P-ANSI | E-EPDM | A-Acid-pickling E-Electropolishing P-Polishing S-Sand Blasting |
| | 2-Bag No.2 | 6-316 | | 43-3/4" | 10K-JIS | N-NBR | |
| | | 6L-316L | Side In & Bottom Out | 1-1" | PN10-DIN | V-VITON | |
| | | | | 121-1-1/2" | C-CLAMP | S-Silicon | |
| | | | | 2-2" | PF-PTF | T-Teflon +Silicon | |
| 221-2-1/2" | NF-NPTF | | | | | | |
| 3-3" | PM-PTM | | | | | | |
| | | | | | NM-NPTM | | |

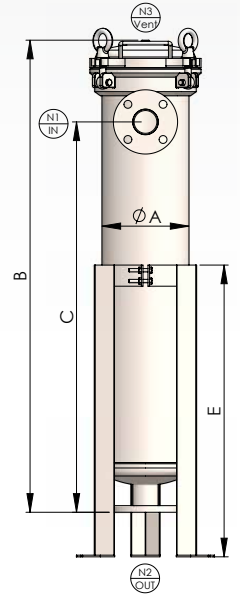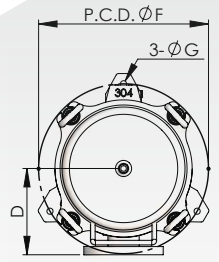

KH (Bag No.1~No.2) Specifications

| Model | A m/m | B m/m | C m/m | D m/m | E m/m | F (PCD) m/m | G m/m | M3/Hr | GPM | Weight | Volume |
|-------|-------|-------|-------|-------|-------|-------------|-------|-------|-----|--------|--------|
| KH1 | Ø232 | 735 | 545 | 176 | 515 | Ø323 | Ø12 | 20 | 90 | 34kg | 23L |
| KH2 | Ø232 | 1190 | 925 | 176 | 515 | Ø323 | Ø12 | 45 | 200 | 43kg | 37L |