


FA


High Flow Single Filter Cartridge Housing

Design P.	225psi
Design T.	100°C
Max Operating P.	225psi
Operating T.	75°C

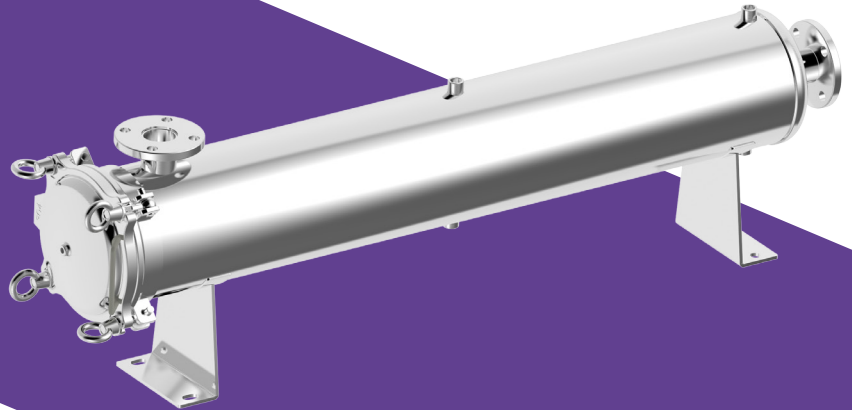


Features

1. Excellent durability and tolerance of high pressure.
2. High Flow type allows high filtration efficiency.
3. Horizontal housing with side-opened top cover design allows easier and safer cartridge change-outs.
3. High-thickness rubber Oring allows for easy installation and resistance of spillage.

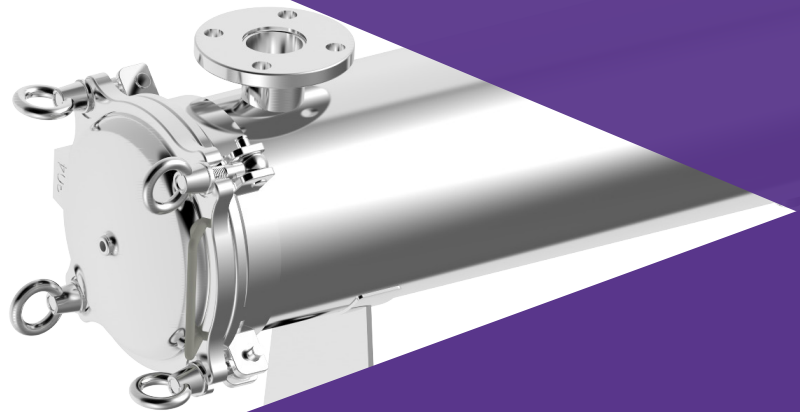



Applications

Chemicals	RO Pre-filtration process
Petrochemical	Water filtration
Beverage Industry	Pharmaceutical
Liquor manufacture	Experiment Process
Food industry	Gas Filter
Electroplating Industry	Sewage treatment
High temperature manufacturing processes	Electronic Industry

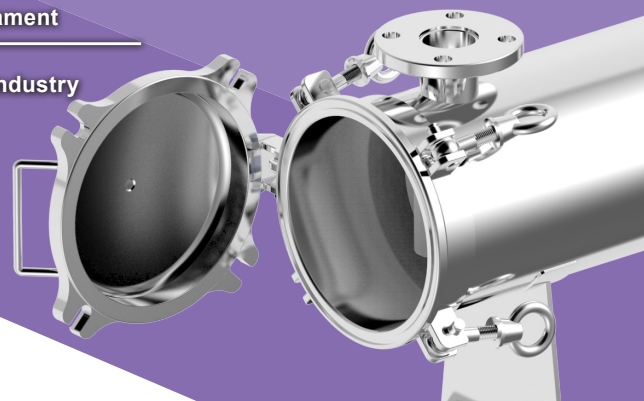

FA Ordering Guide

FA	1	4	3H	2	10K	E	EA
Model	Length	Material	Adapter	Connection Size	Connection Type	O-ring	Outside / Inside Finishes
FA	4-40" 6-60"	4-304 6-316 6L-316L	3H-3M High flow 37-3M 700 PM-Pall Max	21-1/2" 43-3/4" 1-1" 121-1-1/2" 2-2" 221-2-1/2" 3-3"	150P-ANSI 10K-JIS PN10-DIN C-CLAMP PF-PTF NF-NPTF PM-PTM NM-NPTM	E-EPDM N-NBR V-VITON S-Silicon T-Teflon +Silicon	A-ACID-Pickling E- Eletropolishing P-Polishing S-Sand Blasting

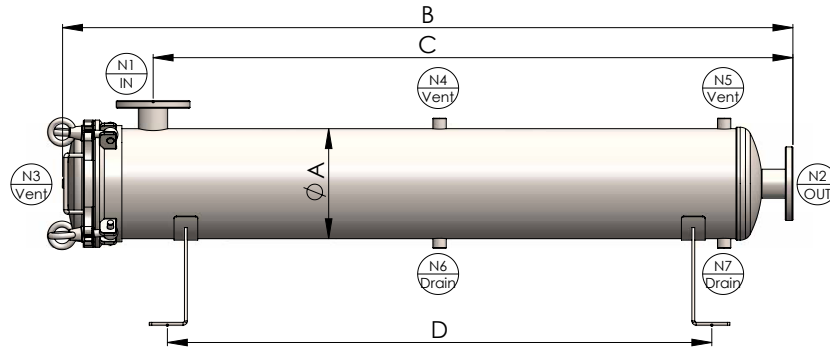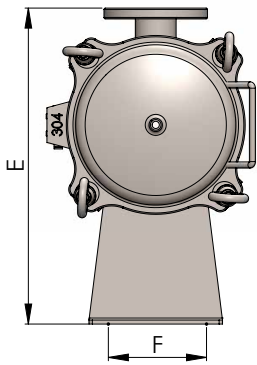

FA Specifications

Model	Length	A m/m	B m/m	C m/m	D m/m	E m/m	F m/m	M3/Hr	Weight
1FA	40"	Ø232	1349	1540	1120	476	160	94	50kg
1FA	60"	Ø232	2150	1959	1730	476	160	140	57kg