

TL

束環式濾心機 Clamp Type Multicartridge Housing (3-7Rounds)






設計壓力 Design P.	10 kgf/cm ² 150 psi	最大操作壓力 Max Operating P.	10 kgf/cm ² 150 psi
設計溫度 Design T.	100°C	操作溫度 Operating T.	75°C
選購配件 Accessory	各式濾芯 Cartridges		



TL	7	2	4	F	2	PF	E	EA
產品型號 Model	濾心支數 No. of Filter Cartridge	濾心長度 Length	產品材質 Material	濾心接頭 Adapters	進出口尺寸 Connection Size	進出口規格 Connection Type	O 環材質 O-ring	外 / 內表面處理 Outside & Inside Finishes
TL	3 4 5 6 7	1-10" 2-20" 3-30" 4-40"	4-304 6-316 6L-316L	F-DOE 5-222 7-226	21-1/2" 43-3/4" 1-1" 121-1-1/2" 2-2" 221-2-1/2" 3-3" 4-4"	150P-ANSI 10K-JIS PN10-DIN C-CLAMP PF-PT/BSPT/Rc (Female) PM-PT/BSPT/R (Male) NF-NPT (Female) NM-NPT (Male) BF-BSPF/G (Female) BM-BSPF/G (Male)	E-EPDM N-NBR V-VITON S-SILICON TS-TEFLON+SILICON	A- 酸洗 Acid Pickling E- 電解 Electropolishing P- 拋光 Polishing

No.	名稱	Description
1	排氣口	Vent
2	上蓋	Top cover
3	束環	Clamp
4	O 型環	O-ring
5	桶蓋	Shell flange
6	壓板螺母	Nut
7	壓板	Pressure plate
8	雙頭牙條	Threaded rod
9	彈簧組	Springs
10	桶體	Shell
11	入水口	Inlet
12	濾心角條	Cartridge post
13	集水板螺母	Nut
14	集水板	Cartridge seat plate
15	杯座	Pedestal
16	排出口	Drain
17	出水口	Outlet
18	端板	Bottom cover
19	L 型腳架	Support leg

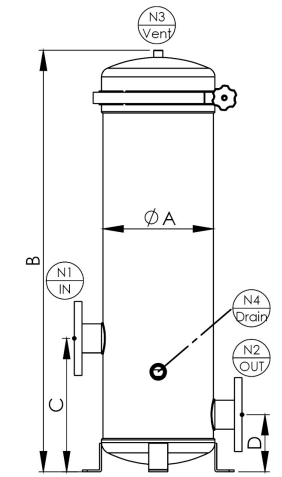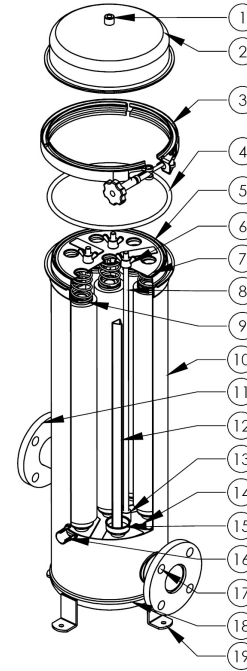

型式 Model	濾心長度 Length	N1/N2	N3	N4	A m/m	B m/m	C m/m	D/m	E m/m	F(PCD) m/m	流量 M ³ /Hr	流量 (加侖) GPM
TL3~4	10"	1/2"~3"	1/4"	3/4"	Ø180	625	280	120	300	Ø236	3~4	13~18
TL3~4	20"	1/2"~3"	1/4"	3/4"	Ø180	890	280	120	300	Ø236	6~8	26~35
TL3~4	30"	1/2"~3"	1/4"	3/4"	Ø180	1145	280	120	300	Ø236	9~12	39~53
TL5~7	10"	1/2"~3"	1/4"	3/4"	Ø232	625	280	120	352	Ø288	5~7	22~31
TL5~7	20"	1/2"~3"	1/4"	3/4"	Ø232	890	280	120	352	Ø288	10~14	44~62
TL5~7	30"	1/2"~3"	1/4"	3/4"	Ø232	1145	280	120	352	Ø288	15~21	66~93
TL5~7	40"	1/2"~3"	1/4"	3/4"	Ø232	1400	280	120	352	Ø288	20~28	88~124