

KL

單袋束環式濾袋機 Clamp Type Single Filter Bag Housing




設計壓力 10 kgf/cm² 最大操作壓力 10 kgf/cm²
Design P. 150 psi Max Operating P. 150 psi

設計溫度 100°C 操作溫度 75°C
Design T. Operating T.



選購配件 各式濾袋、壓袋器、濾袋撐開架、金屬浮球
Accessory Filter Bag, Bag Pressing, Bag Bracket, Metal Float Ball



KL	2	4	SB	2	10K	E	EA
產品型號 Model	濾袋規格 Bag Size	產品材質 Material	進出口方向 Connection	進出口尺寸 Connection Size	進出口規格 Connection Type	O 環材質 O-ring	外 / 內表面處理 Outside & Inside Finishes
KL	1-Bag No.1 2-Bag No.2 3-Bag No.3 4-Bag No.4	4-304 6-316 6L-316L	SS-側進側出 Side In & Side Out SB-側進底出 Side In & Bottom Out	21-1/2" 43-3/4" 1-1" 121-1-1/2" 2-2" 221-2-1/2" 3-3"	150P-ANSI 10K-JIS PN10-DIN C-CLAMP PF-PT/BSPT/Rc (Female) PM-PT/BSPT/R (Male) NF-NPT (Female) NM-NPT (Male) BF-BSPF/G (Female) BM-BSPF/G (Male)	E-EPDM N-NBR V-VITON S-SILICON TS-TEFLON+SILICON	A- 酸洗 Acid Pickling E- 電解 Electropolishing P- 拋光 Polishing

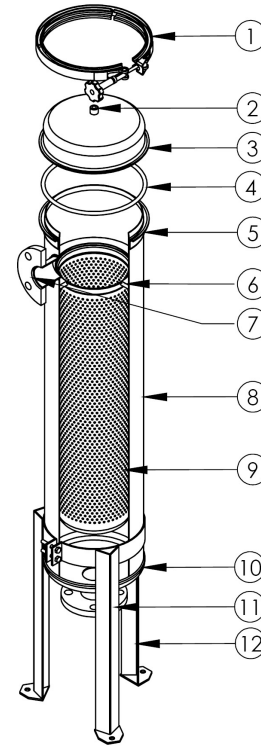

No.	名稱	Description
1	束環	Clamp
2	排氣口	Vent
3	上蓋	Top cover
4	O 型環	O-ring
5	桶蓋	Shell flange
6	濾袋座	Filter bag plate
7	入水口	Inlet
8	桶體	Shell
9	金屬內網	Basket
10	端板	Bottom cover
11	出水口	Outlet
12	活動腳架	Support leg

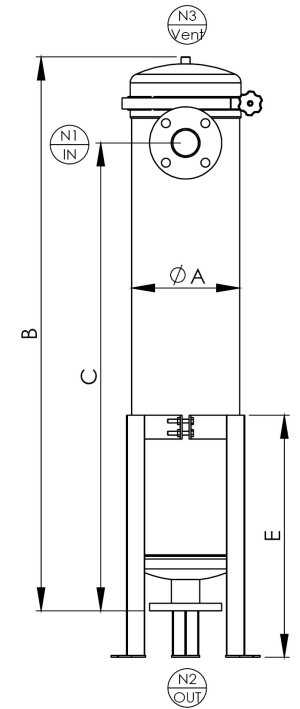

型式 Model	N1/N2	N3	A m/m	B m/m	C m/m	D m/m	E m/m	F (PCD) m/m	G m/m	流量 M ³ /Hr	流量 (加侖) GPM
KL1	1/2"~3"	1/4"	Ø232	740	550	176	515	Ø323	Ø12	20	88
KL2	1/2"~3"	1/4"	Ø232	1195	1005	176	515	Ø323	Ø12	45	198
KL3	1/2"~3"	1/4"	Ø180	540	360	150	350	Ø252	Ø12	4.5	20
KL4	1/2"~3"	1/4"	Ø180	675	495	150	350	Ø252	Ø12	9	40