

HA

家用水塔過濾器 (標準型) Household Filter Cartridge Housing (Standard Type)




設計壓力 10 kgf/cm² 最大操作壓力 10 kgf/cm²
Design P. 150 psi Max Operating P. 150 psi

設計溫度 75°C 操作溫度 40°C
Design T. Operating T.



選購配件 二合一濾芯
Accessory Cartridges



HA	1	4	F	1	PF	E	EA
產品型號	濾心長度	產品材質	濾心接頭	進出口尺寸	進出口規格	O 環材質	外 / 內表面處理
Model	Length	Material	Adapters	Connection Size	Connection Type	O-ring	Outside & Inside Finishes
HA	1-10" 2-20"	4-304	F-DOE 5-222	1-1"	PF-PT/BSPT/Rc (Female) PM-PT/BSPT/R (Male) NF-NPT (Female) NM-NPT (Male) BF-BSPF/G (Female) BM-BSPF/G (Male)	E-EPDM N-NBR V-VITON S-SILICON	A- 酸洗 Acid Pickling E- 電解 Electropolishing P- 拋光 Polishing

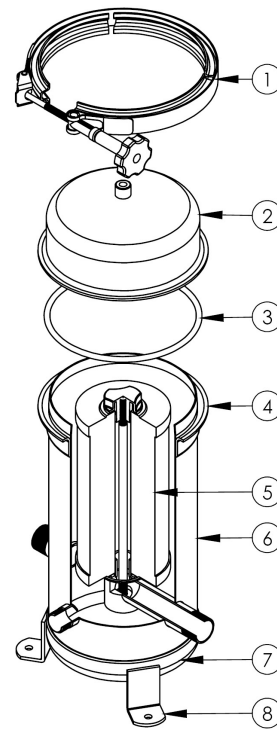

No.	名稱	Description
1	夾環	Clamp
2	上蓋	Cover
3	O 型環	O-ring
4	桶唇	Shell flange
5	二合一濾芯	Filter cartridge
6	桶體	Shell
7	端板	Bottom cover
8	L 型腳架	Support leg

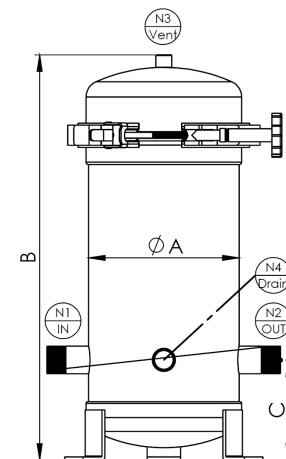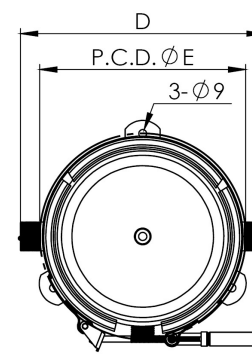

型式 Model	濾心長度 Length	N1/N2	N3	N4	A m/m	B m/m	C m/m	D m/m	E(PCD) m/m
HA1	10"	1"	1/4"	3/4"	Ø180	445	120	280	Ø236
HA2	20"	1"	1/4"	3/4"	Ø180	695	120	280	Ø236