

TL

束環式濾心機

Clamp Type Multicartridge Housing (3-7Rounds)






設計壓力	10 kgf/cm ²	最大操作壓力	10 kgf/cm ²
Design P.	150 psi	Max Operating P.	150 psi
設計溫度	100°C	操作溫度	75°C
Design T.		Operating T.	
選購配件	各式濾芯		
Accessory	Cartridges		



TL	7	2	4	F	2	PF	E	EA
產品型號	濾心支數	濾心長度	產品材質	濾心接頭	進出口尺寸	進出口規格	O 環材質	外 / 內表面處理
Model	No. of Filter Cartridge	Length	Material	Adapters	Connection Size	Connection Type	O-ring	Outside & Inside Finishes
TL	3	1-10"	4-304	F-DOE	21-1/2"	150P-ANSI	E-EPDM	A- 酸洗
	4	2-20"	6-316	5-222	43-3/4"	10K-JIS	N-NBR	Acid Pickling
	5	3-30"	6L-316L	7-226	1-1"	PN10-DIN	V-VITON	E- 電解
	6	4-40"			121-1-1/2"	C-CLAMP	S-SILICON	Electropolishing
	7				2-2"	PF-PT/BSPT/Rc (Female)	TS-TEFLON+SILICON	P- 拋光
					221-2-1/2"	PM-PT/BSPT/R (Male)		Polishing
					3-3"	NF-NPT (Female)		
					4-4"	NM-NPT (Male)		
						BF-BSPF/G (Female)		
						BM-BSPF/G (Male)		

No.	名稱	Description
1	排氣口	Vent
2	上蓋	Top cover
3	束環	Clamp
4	O 型環	O-ring
5	桶唇	Shell flange
6	壓板螺母	Nut
7	壓板	Pressure plate
8	雙頭牙條	Threaded rod
9	彈簧組	Springs
10	桶體	Shell
11	入水口	Inlet
12	濾心角條	Cartridge post
13	集水板螺母	Nut
14	集水板	Cartridge seat plate
15	杯座	Pedestal
16	排放口	Drain
17	出水口	Outlet
18	端板	Bottom cover
19	L 型腳架	Support leg

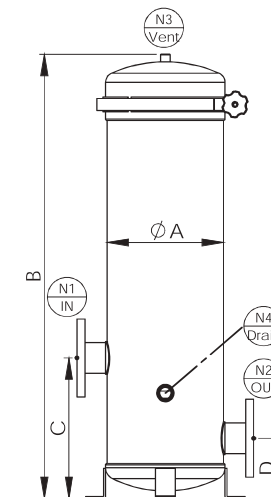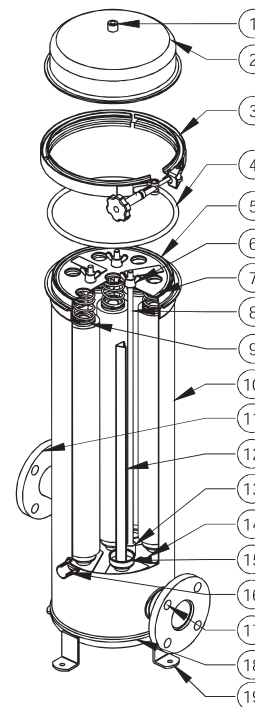

型 式	濾心長度	N1/N2	N3	N4	A m/m	B m/m	C m/m	D /m	E m/m	F(PCD) m/m	流量 M ³ /Hr	流量 (加侖) GPM
Model	Length											
TL3~4	10"	1/2"~3"	1/4"	3/4"	Ø180	625	280	120	300	Ø236	3~4	13~18
TL3~4	20"	1/2"~3"	1/4"	3/4"	Ø180	890	280	120	300	Ø236	6~8	26~35
TL3~4	30"	1/2"~3"	1/4"	3/4"	Ø180	1145	280	120	300	Ø236	9~12	39~53
TL5~7	10"	1/2"~3"	1/4"	3/4"	Ø232	625	280	120	352	Ø288	5~7	22~31
TL5~7	20"	1/2"~3"	1/4"	3/4"	Ø232	890	280	120	352	Ø288	10~14	44~62
TL5~7	30"	1/2"~3"	1/4"	3/4"	Ø232	1145	280	120	352	Ø288	15~21	66~93
TL5~7	40"	1/2"~3"	1/4"	3/4"	Ø232	1400	280	120	352	Ø288	20~28	88~124

T 系列

K 系列

F 系列

S 系列

R 系列

H 系列

L 系列

X 系列

www.oztiter.com

08

OZTITER

TA

TJ

TAH

TL

TH

TM

TR

TRQ

www.oztiter.com

07

OZTITER