

TH

螺絲式濾心機 Swing Bolt Type Multicartridge Housing




設計壓力 Design P.	15 kgf/cm ² 225 psi	最大操作壓力 Max Operating P.	15 kgf/cm ² 225 psi
設計溫度 Design T.	100°C	操作溫度 Operating T.	75°C



選購配件 各式濾芯
Accessory Cartridges



TH	7	2	4	F	2	10K	E	EA
產品型號 Model	濾心支數 No. of Filter Cartridge	濾心長度 Length	產品材質 Material	濾心接頭 Adapters	進出口尺寸 Connection Size	進出口規格 Connection Type	O環材質 O-ring	外 / 內表面處理 Outside & Inside Finishes
TH	3	1-10"	4-304	F-DOE	21-1/2"	150P-ANSI	E-EPDM	A- 酸洗 Acid Pickling
	4	2-20"	6-316	5-222	43-3/4"	10K-JIS	N-NBR	E- 電解 Electropolishing
	5	3-30"	6L-316L	7-226	1-1"	PN10-DIN	V-VITON	P- 拋光 Polishing
	6	4-40"			121-1-1/2"	C-CLAMP	S-SILICON	S- 噴砂 Sand Blasting
	7				2-2"	PF-PT/BSPT/Rc (Female)	TS-TEFLON+SILICON	
					221-2-1/2"	PM-PT/BSPT/R (Male)		
					3-3"	NF-NPT (Female)		
					4-4"	NM-NPT (Male)		
						BF-BSPF/G (Female)		
						BM-BSPF/G (Male)		

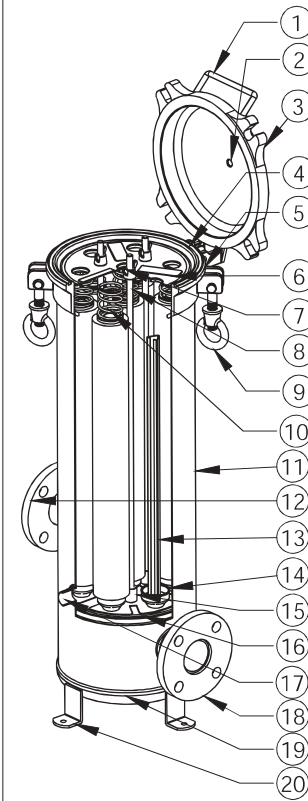

No.	名稱	Description
1	把手	Handle
2	排氣口	Vent
3	上蓋	Top cover
4	O型環	O-ring
5	桶唇	Shell flange
6	壓板	Pressure plate
7	壓板螺母	Nut
8	雙頭牙條	Center post
9	單眼螺絲組	Eye bolt
10	彈簧組	Springs
11	桶體	Shell
12	入水口	Inlet
13	濾心角條	Cartridge post
14	杯座	Pedestal
15	集水板螺母	Nut
16	集水板	Cartridge seat plate
17	排放口	Drain
18	出水口	Outlet
19	端板	Bottom cover
20	L型腳架	Support leg

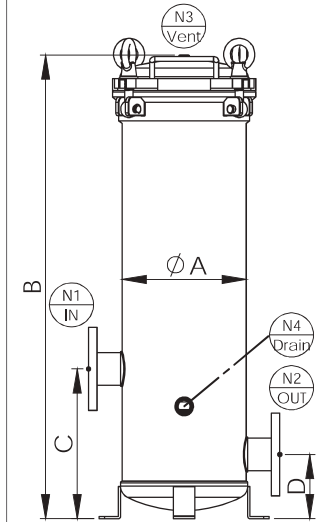

型式 Model	濾心長度 Length	N1/N2	N3	N4	A m/m	B m/m	C m/m	D m/m	E m/m	F (PCD) m/m	流量 M ³ /Hr	流量 (加侖) GPM
TH3~4	10"	1/2"~3"	1/4"	3/4"	Ø180	641	280	120	300	Ø236	3~4	13~18
TH3~4	20"	1/2"~3"	1/4"	3/4"	Ø180	896	280	120	300	Ø236	6~8	26~35
TH3~4	30"	1/2"~3"	1/4"	3/4"	Ø180	1151	280	120	300	Ø236	9~12	39~53
TH5~7	10"	1/2"~3"	1/4"	3/4"	Ø232	605	280	120	358	Ø288	5~7	22~31
TH5~7	20"	1/2"~3"	1/4"	3/4"	Ø232	860	280	120	358	Ø288	10~14	44~62
TH5~7	30"	1/2"~3"	1/4"	3/4"	Ø232	1115	280	120	358	Ø288	15~21	66~93
TH5~7	40"	1/2"~3"	1/4"	3/4"	Ø232	1370	280	120	358	Ø288	20~28	88~124

T 系列

K 系列

F 系列

S 系列

R 系列

H 系列

L 系列

X 系列