

KL

單袋束環式濾袋機

Clamp Type Single Filter Bag Housing




設計壓力	10 kgf/cm ²	最大操作壓力	10 kgf/cm ²
Design P.	150 psi	Max Operating P.	150 psi

設計溫度	100°C	操作溫度	75°C
Design T.		Operating T.	



選購配件 各式濾袋、壓袋器、濾袋撐開架、金屬浮球
Accessory Filter Bag, Bag Pressing, Bag Bracket, Metal Float Ball



KL	2	4	SB	2	10K	E	EA
產品型號	濾袋規格	產品材質	進出口方向	進出口尺寸	進出口規格	O 環材質	外 / 內表面處理
Model	Bag Size	Material	Connection	Connection Size	Connection Type	O-ring	Outside & Inside Finishes
KL	1-Bag No.1 2-Bag No.2 3-Bag No.3 4-Bag No.4	4-304 6-316 6L-316L	SS- 側進側出 Side In & Side Out SB- 側進底出 Side In & Bottom Out	21-1/2" 43-3/4" 1-1" 121-1-1/2" 2-2" 221-2-1/2" 3-3"	150P-ANSI 10K-JIS PN10-DIN C-CLAMP PF-PT/BSPT/Rc (Female) PM-PT/BSPT/R (Male) NF-NPT (Female) NM-NPT (Male) BF-BSPF/G (Female) BM-BSPF/G (Male)	E-EPDM N-NBR V-VITON S-SILICON TS-TEFLON+SILICON	A- 酸洗 Acid Pickling E- 電解 Electropolishing P- 拋光 Polishing

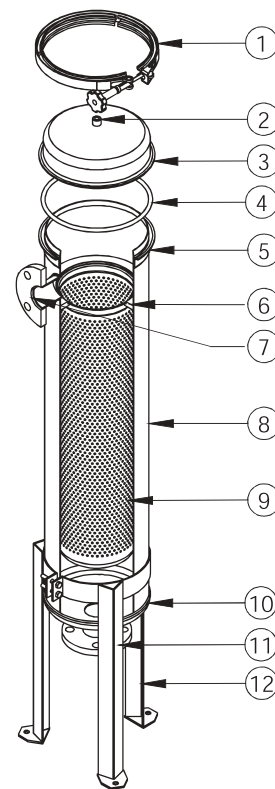

No.	名稱	Description
1	束環	Clamp
2	排氣口	Vent
3	上蓋	Top cover
4	O 型環	O-ring
5	桶唇	Shell flange
6	濾袋座	Filter bag plate
7	入水口	Inlet
8	桶體	Shell
9	金屬內網	Basket
10	端板	Bottom cover
11	出水口	Outlet
12	活動腳架	Support leg

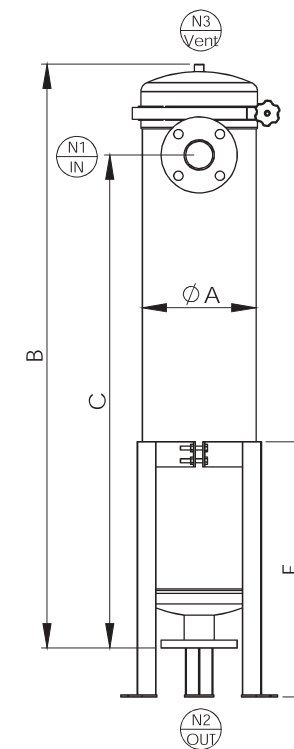

型式 Model	N1/N2	N3	A m/m	B m/m	C m/m	D m/m	E m/m	F (PCD) m/m	G m/m	流量 M ³ /Hr	流量 (加侖) GPM
KL1	1/2"~3"	1/4"	Ø232	740	550	176	515	Ø323	Ø12	20	88
KL2	1/2"~3"	1/4"	Ø232	1195	1005	176	515	Ø323	Ø12	45	198
KL3	1/2"~3"	1/4"	Ø180	540	360	150	350	Ø252	Ø12	4.5	20
KL4	1/2"~3"	1/4"	Ø180	675	495	150	350	Ø252	Ø12	9	40

T 系列

K 系列

F 系列

S 系列

R 系列

H 系列

L 系列

X 系列

www.oztiter.com

18

KL

KH

KU

KT

KM

KR

KRQ

OZTITER

www.oztiter.com

17

OZTITER