


SL

多支衛生級過濾器 (束環式) Sanitary Multi Filter Cartridge Housing (Clamp Type)



設計壓力 Design P.	10 kgf/cm ² 150 psi	最大操作壓力 Max Operating P.	10 kgf/cm ² 150 psi
設計溫度 Design T.	100°C	操作溫度 Operating T.	75°C
選購配件 各式濾芯 Accessory Cartridges			



SL	6	2	4	5	2	C	E	PP
產品型號 Model	濾心支數 No. of Filter Cartridge	濾心長度 Length	產品材質 Material	濾心接頭 Adapters	進出口尺寸 Connection Size	進出口規格 Connection Type	O 環材質 O-ring	外 / 內表面處理 Outside & Inside Finishes
SL	2 3 4 5 6	1-10" 2-20" 3-30" 4-40"	4-304 6-316 6L-316L	F-DOE 5-222 7-226	21-1/2" 43-3/4" 1-1" 121-1-1/2" 2-2" 221-2-1/2"	150P-ANSI 10K-JIS PN10-DIN C-CLAMP PF-PT/BSPT/Rc (Female) PM-PT/BSPT/R (Male) NF-NPT (Female) NM-NPT (Male) BF-BSPF/G (Female) BM-BSPF/G (Male)	E-EPDM N-NBR V-VITON S-SILICON TS-TEFLON+SILICON	E- 電解 Electropolishing P- 拋光 Polishing

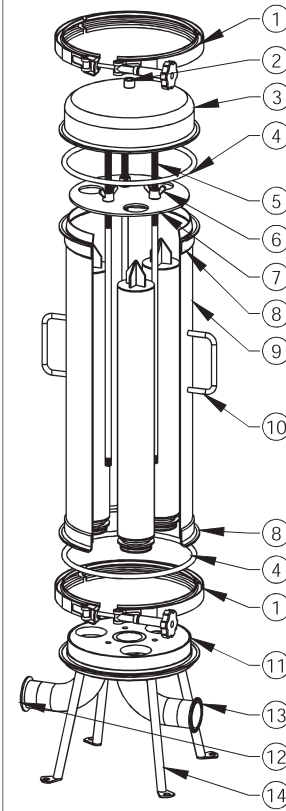

No.	名稱	Description
1	束環	Clamp
2	排氣口	Vent
3	上蓋	Top cover
4	O 型環	O-ring
5	雙頭牙條	Threaded rod
6	壓板螺母	Nut
7	壓板	Pressure plate
8	桶唇	Shell flange
9	桶體	Shell
10	把手	Handle
11	底座	Base
12	出水口	Outlet
13	入水口	Inlet
14	腳架	Support leg

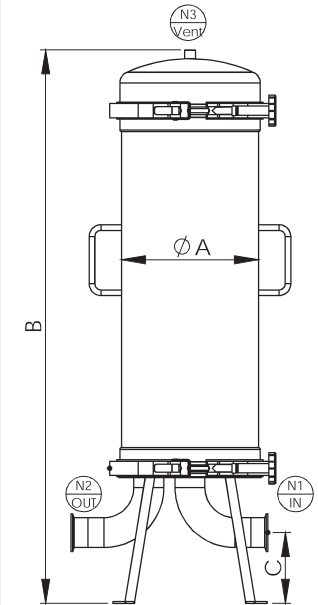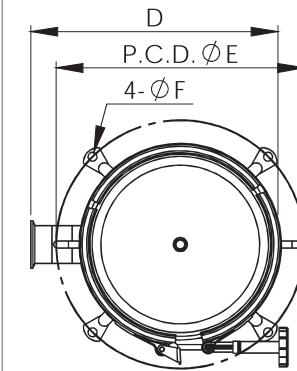

型式 Model	濾心長度 Length	N1/N2	N3	A m/m	B m/m	C m/m	D m/m	E(PCD) m/m	F m/m	流量 M ³ /Hr	流量 (加侖) GPM
SL2~6	10"	2"	1/4"	Ø232	675	120	332	Ø368	Ø12	2~6	9~26
SL2~6	20"	2"	1/4"	Ø232	925	120	332	Ø368	Ø12	4~12	18~53
SL2~6	30"	2"	1/4"	Ø232	1175	120	332	Ø368	Ø12	6~18	26~79
SL2~6	40"	2"	1/4"	Ø232	1425	120	332	Ø368	Ø12	8~24	35~106