

# RA8


## 8"RO 管件 (三片式束環) RO Membrane Housing (Band Clamp Type)





設計壓力 Design P.	10 kgf/cm <sup>2</sup> 150 psi	最大操作壓力 Max Operating P.	10 kgf/cm <sup>2</sup> 150 psi
設計溫度 Design T.	100°C	操作溫度 Operating T.	75°C
標準口徑 Standards	N1-1" 內牙 · N2-1 1/2" 機械接頭		
Nozzle	N1-1"PT-F. N2-1 1/2"V. Mechanical Joint		



RA8	4	4	1	PF	1	V	E	BA
產品型號 Model	管身尺寸 Length	管身材質 Shell Material	N1 尺寸 N1 Size	N1 規格 N1 Type	N2 尺寸 N2 Size	N2 規格 N2 Type	O 環材質 O-ring	外 / 內表面處理 Outside & Inside Finishes
RA8	4-40"	4-304 6-316	1-1" 121-1-1/2" 2-2"	PF-PTF NF-NPTF V-Mechanical Joint C-CLAMP	1-1" 121-1-1/2" 2-2"	PF-PT/BSPT/Rc (Female) NF-NPT (Female) V-Mechanical joint C-CLAM	E-EPDM N-NBR V-VITON	A- 酸洗 Acid pickling B- 研磨 Burnishing P- 拋光 Polishing

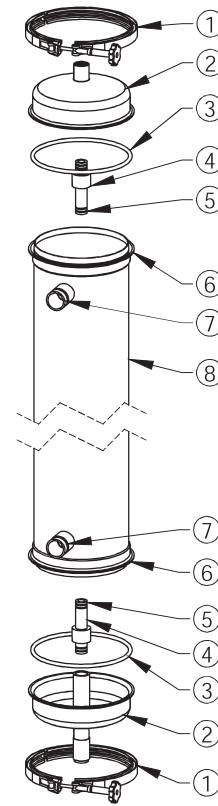

No.	名稱	Description
1	束環	Clamp
2	RO 端板	RO head
3	O 型環	O-ring
4	PVC 接管	PVC coupling
5	O 型環	O-ring
6	桶唇	Shell flange
7	機械接頭	Mechanical joint
8	管殼	Shell

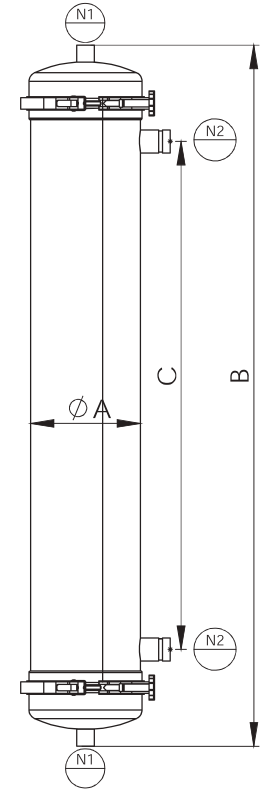

型式 Model	N1	N2	A m/m	B m/m	C m/m	D m/m
RA8-4	1"	1-1/2"	Ø232	1481	1070	178