

# HA

## 家用水塔過濾器 (標準型) Household Filter Cartridge Housing (Standard Type)




設計壓力 Design P.	10 kgf/cm <sup>2</sup> 150 psi	最大操作壓力 Max Operating P.	10 kgf/cm <sup>2</sup> 150 psi
設計溫度 Design T.	75℃	操作溫度 Operating T.	40℃



選購配件 二合一濾芯  
Accessory Cartridges



HA	1	4	F	1	PF	E	EA
產品型號 Model	濾心長度 Length	產品材質 Material	濾心接頭 Adapters	進出口尺寸 Connection Size	進出口規格 Connection Type	O環材質 O-ring	外 / 內表面處理 Outside & Inside Finishes
HA	1-10" 2-20"	4-304	F-DOE 5-222	1-1"	PF-PT/BSPT/Rc (Female) PM-PT/BSPT/R (Male) NF-NPT (Female) NM-NPT (Male) BF-BSPF/G (Female) BM-BSPF/G (Male)	E-EPDM N-NBR V-VITON S-SILICON	A- 酸洗 Acid Pickling E- 電解 Electropolishing P- 拋光 Polishing

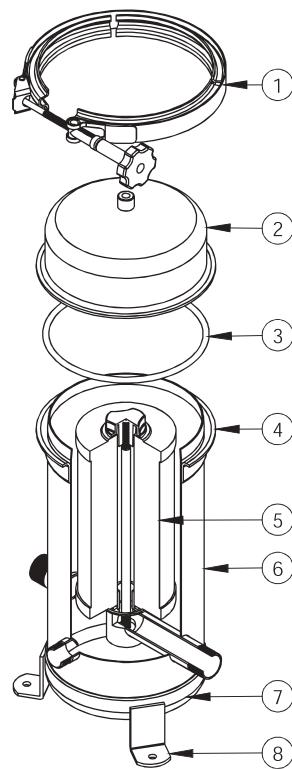

No.	名稱	Description
1	束環	Clamp
2	上蓋	Cover
3	O型環	O-ring
4	桶唇	Shell flange
5	二合一濾芯	Filter cartridge
6	桶體	Shell
7	底板	Bottom cover
8	L型腳架	Support leg

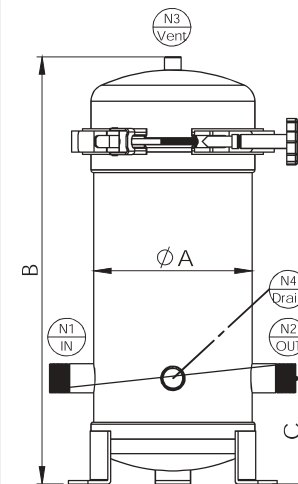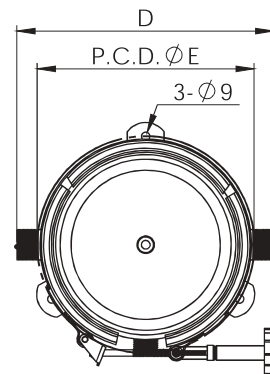

型式 Model	濾心長度 Length	N1/N2	N3	N4	A m/m	B m/m	C m/m	D m/m	E(PCD) m/m
HA1	10"	1"	1/4"	3/4"	Ø180	445	120	280	Ø236
HA2	20"	1"	1/4"	3/4"	Ø180	695	120	280	Ø236

T系列 | K系列 | F系列 | S系列 | R系列 | H系列 | L系列 | X系列