

LA

Sand Filter Housing (Standard Type)

Design P.	150psi
Design T.	65°C
Max Operating P.	150psi
Operating T.	40°C



Features

1. Suitable for softend water and quartz sand filtration applications.
2. Component with manually and electrically Joint0
3. Tough and thick shell prevent housing form leaking.
4. Strong metal consistency allows for excellent durability.



Applications

Chemicals	RO Pre-filtration process
Petrochemical	Water filtration
Beverage Industry	Pharmaceutical
Liquor manufacture	Experiment Process
Food industry	Gas Filter
Electroplating Industry	Sewage treatment
High temperature manufacturing processes	Electronic Industry



LA Ordering Guide

Model	Diameter (Inch)	Height (Inch)	Material	Joint Size	Inlet Size	Inlet Type	Drain Size	Drain Type	Outside / Inside Finishes
LA	7-7"	13-13"	4-304	221-2-1/2"	1-1"	PF-PT(ForM)	43-3/4"	PF-PTF	A-ACID-Pickling
	2	2	6-316	4-4"	2-2"	NF-NPTF	1-1"	NF-NPTF	E-Electropolishing
	22-22"	67-67"	6L-316L				121-1-1/2"		P- Polishing
							2-2"		

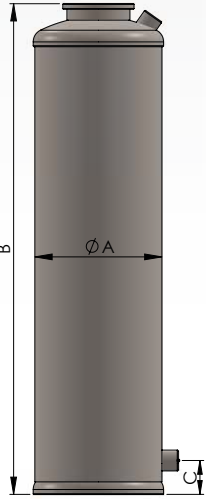

LA Specifications

Model	A m/m	B m/m	C m/m	Weight	Volume
LA7-13	Ø180	334	70	7KG	8L
LA7-17	Ø180	430	70	7KG	10L
LA7-19	Ø180	488	70	8KG	12L
LA7-24	Ø180	620	70	8KG	15L
LA7-30	Ø180	764	70	9KG	19L
LA7-35	Ø180	898	70	10KG	22L
LA7-40	Ø180	1018	70	11KG	25L
LA7-44	Ø180	1129	70	12KG	28L
LA9-17	Ø232	431	70	9KG	18L
LA9-18	Ø232	459	70	9KG	19L
LA9-35	Ø232	896	70	12KG	37L
LA9-40	Ø232	1018	70	13KG	43L
LA9-42	Ø232	1074	70	14KG	45L
LA9-48	Ø232	1228	70	15KG	51L
LA10-16	Ø280	410	90	18KG	24L
LA10-18	Ø280	461	90	18KG	27L
LA10-30	Ø280	762	90	21KG	44L
LA10-35	Ø280	897	90	23KG	52L
LA10-40	Ø280	1020	90	24KG	60L
LA10-44	Ø280	1126	90	24KG	66L
LA10-47	Ø280	1200	90	26KG	70L
LA10-54	Ø280	1386	90	28KG	81L
LA12-48	Ø306	1232	80	32KG	87L
LA12-52	Ø306	1338	80	35KG	94L
LA14-44	Ø344	1140	85	35KG	105L
LA14-52	Ø344	1340	85	40KG	124L
LA14-55	Ø344	1400	85	41KG	130L
LA14-65	Ø344	1674	85	48KG	155L
LA16-52	Ø406	1341	85	47KG	168L
LA16-65	Ø406	1671	85	57KG	209L
LA20-56	Ø508	1432	85	60KG	259L
LA20-69	Ø508	1776	85	72KG	321L
LA20-81	Ø508	2079	85	83KG	376L
LA22-39	Ø552	1002	90	69KG	239L
LA22-56	Ø552	1434	90	92KG	323L
LA22-67	Ø552	1721	90	108KG	411L